

RITMATO 14 STANDARD - RO14S HYDRAULIC

Hydraulic Ritmato radiator made of carbon steel

EN 442


HW



STANDARD HYDRAULIC VERSION
(Connectors OB1)



REAR CONNECTORS VERSION
(Connectors B2R)

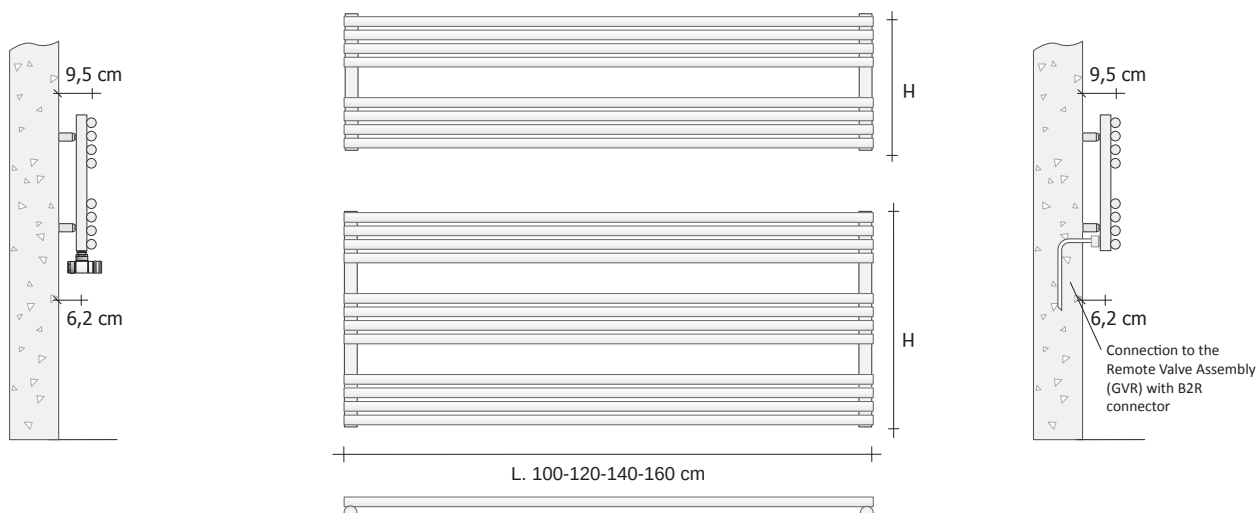


CONNECTORS The heated towel rails are supplied as standard with connectors "OB1".

If different connectors are required, strictly indicate this in the order. **IMPORTANT:** the connectors for heated towel rails and radiators connected to the same system must all have the same configuration, otherwise operating problems may occur.


Standard connectors

Supplied unless otherwise specified in the order.




Special connectors

Provided upon request WITH an additional charge of

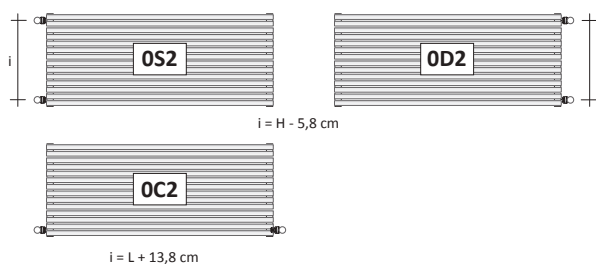


Connectors on request

Available upon request AT NO additional charge.

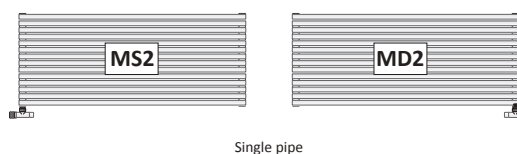

Custom-made connectors

Available upon request WITH an additional charge of

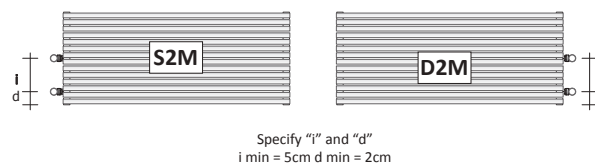

Product code RO14S#1000150B1ST9010212

RO14S#100015	Article code specified in the price table
0B1	Connector code see technical datasheet
ST	Standard support code*
9010	Colour/finish code specified in the Official TUBES COLOUR CHART
212	Sequence code
* for special supports see BRACKET SUPPORTS page	

ADDITIONAL COLOUR CHARGES

See the official TUBES colour chart
 Additional charges calculated on category C0
 RAL not in the colour chart +30%*
 As per sample Subject to quote**
 * Request the feasibility for these categories

RO14S#... standard hydraulic

Model	H (cm)	L (cm)	Interaxis (cm)	Heat output in Watts				Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)	Price Chrome G0 (€)
				COLOURED version ΔT. 50°C	COLOURED version ΔT. 30°C	CHROMED version ΔT. 50°C	CHROMED version ΔT. 30°C				
RO14S#100015	37,0	100,0	96,6	397	207	366	191				
RO14S#100024	58,6	100,0	96,6	615	320	564	294				
RO14S#120015	37,0	120,0	116,6	476	248	438	228				
RO14S#120024	58,6	120,0	116,6	736	383	677	353				
RO14S#140015	37,0	140,0	136,6	556	290	511	266				
RO14S#140024	58,6	140,0	136,6	854	445	789	411				
RO14S#160015	37,0	160,0	156,6	635	331	584	304				
RO14S#160024	58,6	160,0	156,6	982	512	903	470				

In the Chrome (Plated) Version, code RO14S becomes RO14SG

RO14S#... hydraulic with rear connectors B2R

Model	H (cm)	L (cm)	Interaxis (cm)	Heat output in Watts				Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)	Price Chrome G0 (€)
				COLOURED version ΔT. 50°C	COLOURED version ΔT. 30°C	CHROMED version ΔT. 50°C	CHROMED version ΔT. 30°C				
RO14S#100015B2R	37,0	100,0	96,6	397	207	366	191				
RO14S#100024B2R	58,6	100,0	96,6	615	320	564	294				
RO14S#120015B2R	37,0	120,0	116,6	476	248	438	228				
RO14S#120024B2R	58,6	120,0	116,6	736	383	677	353				
RO14S#140015B2R	37,0	140,0	136,6	556	290	511	266				
RO14S#140024B2R	58,6	140,0	136,6	854	445	789	411				
RO14S#160015B2R	37,0	160,0	156,6	635	331	584	304				
RO14S#160024B2R	58,6	160,0	156,6	982	512	903	470				

In the Chrome (Plated) Version, code RO14S becomes RO14SG

Standard convertible valves – Z1TLNR

For more information on the choice of valves, see p. 314

	Code	Description	Finishes	Price (€)
	Z1TLNR#ANR12...	Paired Valve + Lockshield - Copper angle 1/2" and/or Multi-layer 1/2"	Standard White	
	2 x Z1RAC#R12CRO	Paired 12 mm copper pipe unions	Glossy Chrome	
	ZRCF3#9010	Hole-covering washer kit for Heated towel rail	Standard White	

Remote valve assembly – GVR

For more information on the choice of valves, see p. 314

	Code	Description	Finishes	Price (€)
	GVR#...	RECESSED Valve that can be fitted with a thermostat and Lockshield assembly for REMOTE connection	Chromed	
	GVRTG#...	RECESSED thermostatic valve and Lockshield assembly for REMOTE connection*	Plated	
	GVRG#...	RECESSED Valve that can be fitted with a thermostat and Lockshield assembly for REMOTE connection	Coloured	
	GVRTC#...	RECESSED thermostatic valve and Lockshield assembly for REMOTE connection*	Coloured	
Plated finishes: See table of Tubes special finishes Colored Finishes: see categories C0, C1, C2 and C3 of the Tubes color chart * The price does not include the cost of the thermostatic head (see page 324)				

RITMATO 25 STANDARD - RO25S HYDRAULIC

Hydraulic Ritmato radiator made of carbon steel

EN 442


HW



STANDARD HYDRAULIC VERSION
(Connectors OB1)



REAR CONNECTORS VERSION
(Connectors B2R)

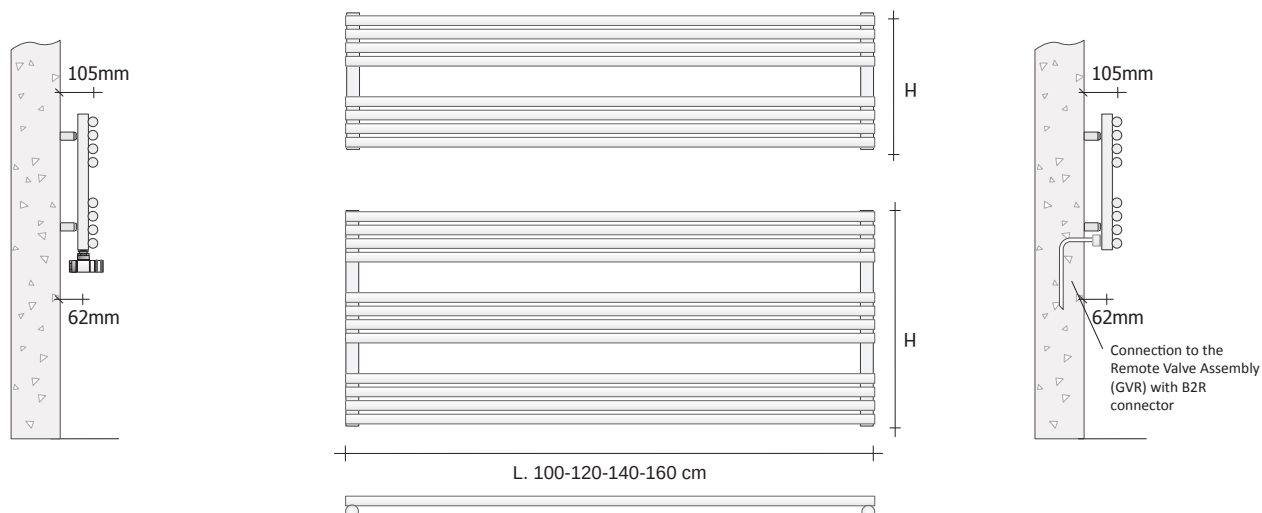


CONNECTORS The heated towel rails are supplied as standard with connectors "OB1"

If different connectors are required, strictly indicate this in the order. **IMPORTANT:** the connectors for heated towel rails and radiators connected to the same system must all have the same configuration, otherwise operating problems may occur.


Standard connectors

Supplied unless otherwise specified in the order.



Connectors on request


Available upon request AT NO additional charge.

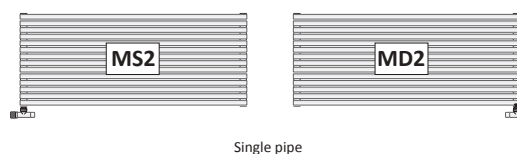

Single pipe


Special connectors

Provided upon request WITH an additional charge of

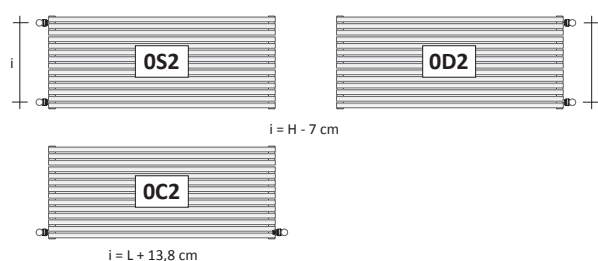

Custom-made connectors

Available upon request WITH an additional charge of

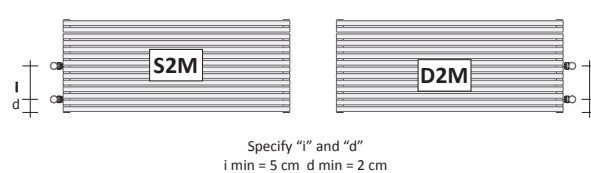

RO25S#100010	Article code specified in the price table
0B1	Connector code see technical datasheet
ST	Standard support code*
9010	Colour/finish code specified in the Official TUBES COLOUR CHART
152	Spacing code
* for special supports see BRACKET SUPPORTS page	

See the official TUBES colour chart
Additional charges calculated on category C0
RAL not in the colour chart +30%*
As per sample Subject to quote**
* Request the feasibility for these categories

Model	H (cm)	L (cm)	Interaxis (cm)	Heat output in Watts			Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
				COLOURED version					
				ΔT. 50°C	ΔT. 30°C				
RO25S#100010B2R	35,5	100,0	96,6	426	221				
RO25S#100016B2R	56,5	100,0	96,6	642	333				
RO25S#120010B2R	35,5	120,0	116,6	512	265				
RO25S#120016B2R	56,5	120,0	116,6	771	399				
RO25S#140010B2R	35,5	140,0	136,6	597	309				
RO25S#140016B2R	56,5	140,0	136,6	899	466				
RO25S#160010B2R	35,5	160,0	156,6	682	353				
RO25S#160016B2R	56,5	160,0	156,6	1027	532				

	Code	Description	Finishes	Price (€)
	Z1TLNR#ANR12...	Paired Valve + Lockshield - Copper angle 1/2" and/or Multi-layer 1/2"	Standard White	
	Z1K1TRAC#001	6-part connector KIT: - 2x Z1RAC#R12CRO - 2x Z1RAC#R14CRO - 2x Z1AC#M03CRO	Glossy Chrome	
	Z1K1TRAC#002	8-part connector KIT: - 2x Z1RAC#R12CRO - 2x Z1RAC#R14CRO - 2x Z1RAC#M03CRO - 2x Z1RAC#M01CRO	Glossy Chrome	

	Code	Description	Finishes	Price (€)
	GVR#...	RECESSED Valve that can be fitted with a thermostat and Lockshield assembly for REMOTE connection	Chromed	
	GVRTG#...	RECESSED thermostatic valve and Lockshield assembly for REMOTE connection*	Plated	
	GVRC#...	RECESSED Valve that can be fitted with a thermostat and Lockshield assembly for REMOTE connection	Coloured	
	GVRTC#...	RECESSED thermostatic valve and Lockshield assembly for REMOTE connection*	Coloured	
Plated finishes: See table of Tubes special finishes Colored Finishes: see categories C0, C1, C2 and C3 of the Tubes color chart * The price does not include the cost of the thermostatic head (see page 324)				

RITMATO RO10S HYDRAULIC

Radiator comprising horizontal 10 mm diameter welded steel elements with 34 mm diameter manifolds

EN 442




HW



STANDARD HYDRAULIC VERSION
(Connectors 0B1)



REAR CONNECTORS VERSION
(Connectors B2R)

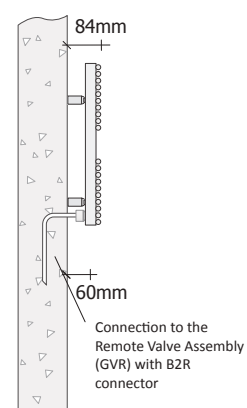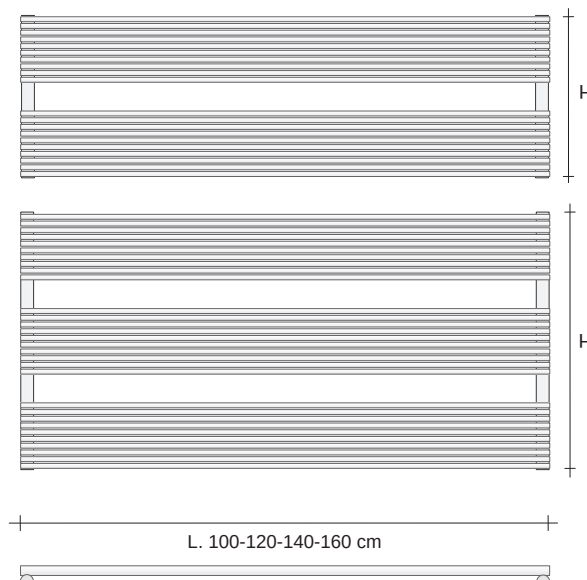


CONNECTORS The heated towel rails are supplied as standard with connectors “0B1”

If different connectors are required, strictly indicate this in the order. **IMPORTANT:** the connectors for heated towel rails and radiators connected to the same system must all have the same configuration, otherwise operating problems may occur.


Standard connectors

Supplied unless otherwise specified in the order.




Special connectors

Provided upon request WITH an additional charge of

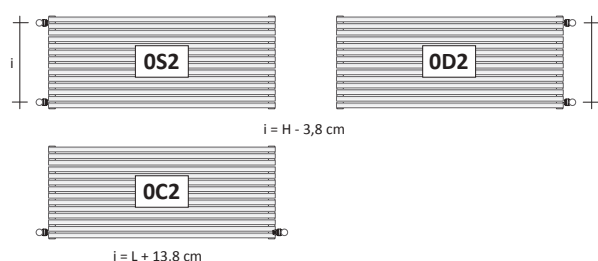

Connectors on request


Available upon request AT NO additional charge.



Single pipe

Custom-made connectors

Available upon request WITH an additional charge of



Specify “i” and “d”
i min = 5 cm d min = 2 cm

Code RO10S#100024 OB1 ST 9010 046

RO10S#100024 Model Code, see price list.

OB1 Connector code, see type of connectors.

* for special supports see BRACKET SUPPORTS page

ADDITIONAL COLOUR CHARGES

See the official TUBES colour chart

Additional charges calculated on category C0

RAL not in the colour chart +30%*

As per sample Subject to quote**

* Request the feasibility for these categories

RO10S#... standard hydraulic

Model	H (cm)	L (cm)	Interaxis (cm)	Heat output in Watts				Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)	Price Chrome G0 (€)
				COLOURED version ΔT. 50°C	COLOURED version ΔT. 30°C	CHROMED version ΔT. 50°C	CHROMED version ΔT. 30°C				
RO10S#100024	36,9	100,0	96,6	517	277	413	221				
RO10S#100038	57,9	100,0	96,6	768	387	579	310				
RO10S#120024	36,9	120,0	116,6	620	405	615	324				
RO10S#120038	57,9	120,0	116,6	922	566	860	453				
RO10S#140024	36,9	140,0	136,6	723	332	496	266				
RO10S#140038	57,9	140,0	136,6	1075	443	661	354				
RO10S#160024	36,9	160,0	156,6	827	486	737	388				
RO10S#160038	57,9	160,0	156,6	1229	647	983	518				

RO10S # ... hydraulic with B2R rear connectors

Model	H (cm)	L (cm)	Interaxis (cm)	Heat output in Watts				Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)	Price Chrome G0 (€)
				COLOURED version ΔT. 50°C	COLOURED version ΔT. 30°C	CHROMED version ΔT. 50°C	CHROMED version ΔT. 30°C				
RO10S#100024B2R	36,9	100,0	96,6	517	277	413	221				
RO10S#100038B2R	57,9	100,0	96,6	768	387	579	310				
RO10S#120024B2R	36,9	120,0	116,6	620	405	615	324				
RO10S#120038B2R	57,9	120,0	116,6	922	566	860	453				
RO10S#140024B2R	36,9	140,0	136,6	723	332	496	266				
RO10S#140038B2R	57,9	140,0	136,6	1075	443	661	354				
RO10S#160024B2R	36,9	160,0	156,6	827	486	737	388				
RO10S#160038B2R	57,9	160,0	156,6	1229	647	983	518				

Standard convertible valves – Z1TLNR

For more information on the choice of valves, see p. 314

	Code	Description	Finishes	Price (€)
	Z1TLNR#ANR12...	Paired Valve + Lockshield - Copper angle 1/2" and/or Multi-layer 1/2"	Standard White	
	Z1TLNRG#ANR12..	Paired Valve + Lockshield - Copper angle 1/2" and/or Multi-layer 1/2"	Glossy Chrome	
	Z1KITRAC#001	Union KIT with 6 pieces for Paired valves - 2 Z1RAC#R12CRO 12 mm copper system O-Rings - 2 Z1RAC#R14CRO 14 mm copper system O-Rings - 2 Z1AC#M03CRO Multi-layer 24x19x11.5/12-16x2/2.25 mm	Glossy Chrome	
	ZRCF3#9010	Couple pipe washer for Heated towel rail	Standard White	
	ZRCF3G#CRO	Couple pipe washer for Heated towel rail	Glossy Chrome	

Remote valve assembly – GVR

For more information on the choice of valves, see p. 314

	Code	Description	Finishes	Price (€)
	GVR#...	RECESSED Valve that can be fitted with a thermostat and Lockshield assembly for REMOTE connection	Chromed	
	GVRTG#...	RECESSED thermostatic valve and Lockshield assembly for REMOTE connection*	Plated	
	GVRG#...	RECESSED Valve that can be fitted with a thermostat and Lockshield assembly for REMOTE connection	Coloured	
	GVRTC#...	RECESSED thermostatic valve and Lockshield assembly for REMOTE connection*	Coloured	
Plated finishes: See table of Tubes special finishes Colored Finishes: see categories C0, C1, C2 and C3 of the Tubes color chart * The price does not include the cost of the thermostatic head (see page 324)				

RITMATO IXSTEEL -RX010S - STANDARD HYDRAULIC

Hydraulic Ritmato radiator made of brushed STAINLESS STEEL

EN 442




HW



STANDARD HYDRAULIC VERSION
(Connectors 0B1)



REAR CONNECTORS VERSION
(Connectors B2R)

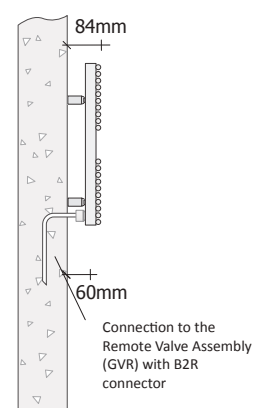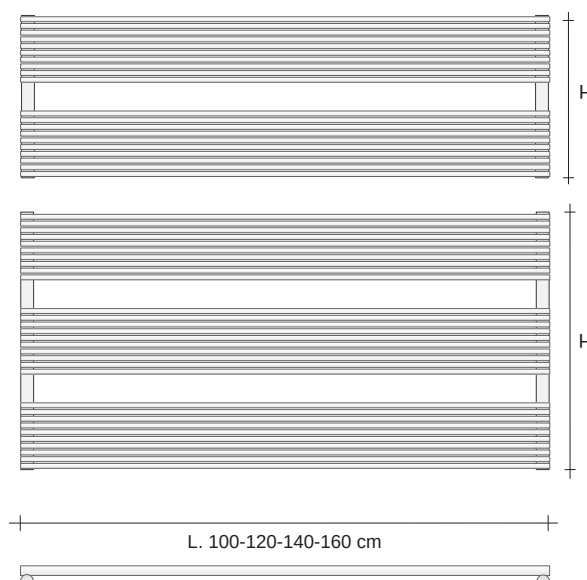


CONNECTORS The heated towel rails are supplied as standard with connectors “0B1”.

If different connectors are required, strictly indicate this in the order. **IMPORTANT:** the connectors for heated towel rails and radiators connected to the same system must all have the same configuration, otherwise operating problems may occur.


Standard connectors

Supplied unless otherwise specified in the order.




Connectors on request

Available upon request AT NO additional charge.

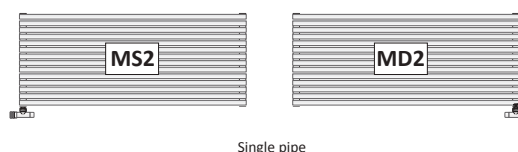


Special connectors

Provided upon request WITH an additional charge of

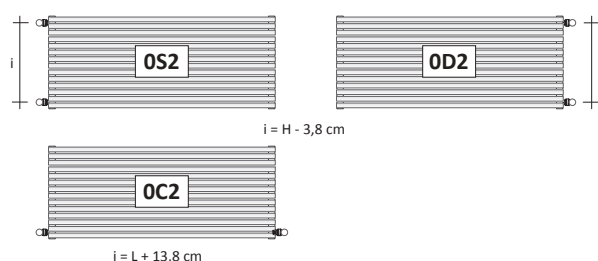

Custom-made connectors

Available upon request WITH an additional charge of

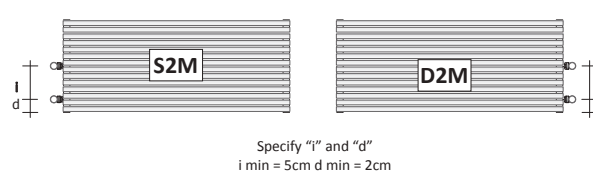

RX010S#100024	Article code specified in the price table
0B1	Connector code see technical datasheet
ST	Standard support code*

Model	H (cm)	L (cm)	Interaxis (cm)	Heat output in Watts Brushed stainless steel version		Price Inox(€)
				ΔT. 50°C	ΔT. 30°C	
RXO10S#100024	36,9	100,0	96,6	348	186	
RXO10S#100038	57,9	100,0	96,6	537	261	
RXO10S#120024	36,9	120,0	116,6	417	283	
RXO10S#120038	57,9	120,0	116,6	645	396	
RXO10S#140024	36,9	140,0	136,6	487	224	
RXO10S#140038	57,9	140,0	136,6	752	299	
RXO10S#160024	36,9	160,0	156,6	557	340	
RXO10S#160038	57,9	160,0	156,6	859	452	

Model	H (cm)	L (cm)	Interaxis (cm)	Heat output in Watts		Price Inox(€)
				Brushed stainless steel version ΔT. 50°C	ΔT. 30°C	
RXO10S#100024B2R	36,9	100,0	96,6	348	186	
RXO10S#100038B2R	57,9	100,0	96,6	537	261	
RXO10S#120024B2R	36,9	120,0	116,6	417	283	
RXO10S#120038B2R	57,9	120,0	116,6	645	396	
RXO10S#140024B2R	36,9	140,0	136,6	487	224	
RXO10S#140038B2R	57,9	140,0	136,6	752	299	
RXO10S#160024B2R	36,9	160,0	156,6	557	340	
RXO10S#160038B2R	57,9	160,0	156,6	859	452	

For more information on the choice of valves, see p. 314

	Code	Description	Finishes	Price (€)
	Z1TCXNR#ANR12...	Valve (that can be fitted with thermostat) and lockshield - STAINLESS STEEL COPPER ANGLE or MULTILAYER	Brushed Stainless Steel	
	Z1TMNR#ANR12SPA	Manual valve and lockshield - STAINLESS STEEL COPPER ANGLE or MULTILAYER	Brushed Stainless Steel	
	2 x Z1RACX#M03SPA	STAINLESS STEEL pipe unions for Multi-layer MM24x19x12 - 16x2	Brushed	

Remote valve assembly GVR
For more information on the choice of valves, see p. 314


	Code	Description	Finishes	Price (€)
	GVRG#NIK GVRTG#NIK	RECESSED Valve that can be fitted with a thermostat and Lockshield assembly for REMOTE connection Thermostatic valve* and lockshield assembly for recessed remote connection	Nickel Brushed	



STANDARD HYDRAULIC VERSION
(Connectors OB1)



STANDARD HYDRAULIC VERSION
(Connectors B2R)

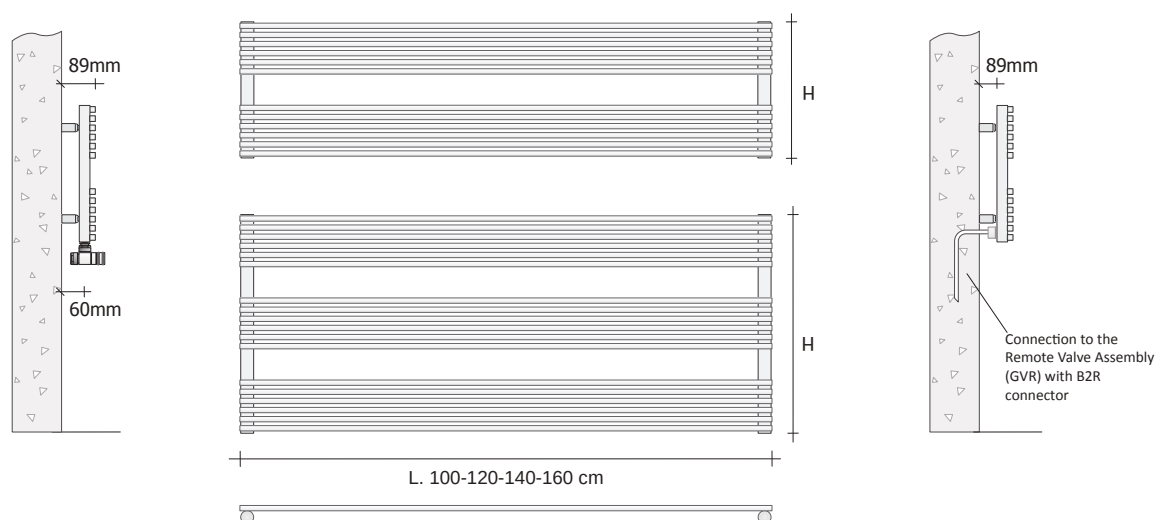


CONNECTORS The heated towel rails are supplied as standard with connectors "OB1"

If different connectors are required, strictly indicate this in the order. **IMPORTANT:** the connectors for heated towel rails and radiators connected to the same system must all have the same configuration, otherwise operating problems may occur.


Standard connectors

Supplied unless otherwise specified in the order.




Connectors on request

Available upon request AT NO additional charge.

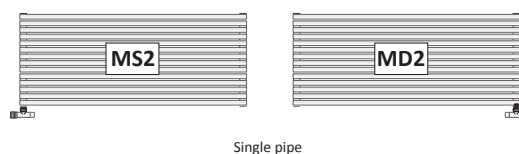


Special connectors

Provided upon request WITH an additional charge of

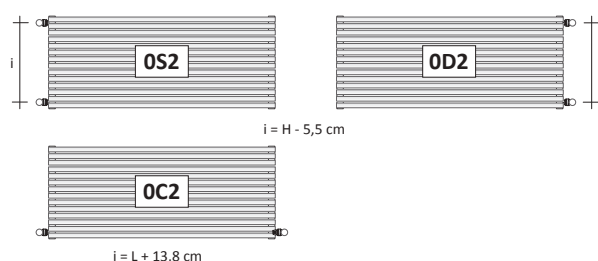

Custom-made connectors

Available upon request WITH an additional charge of

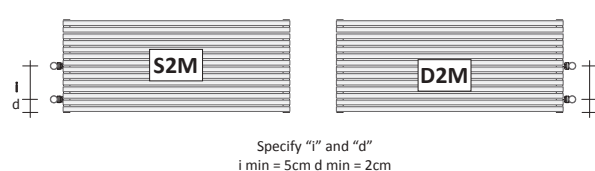

Specify "i" and "d"
i min = 5cm d min = 2cm

RK015S#100015	Article code specified in the price table
OB1	Connector code see technical datasheet
ST	Standard support code*

See the official TUBES colour chart
Additional charges calculated on category C0
RAL not in the colour chart +30%*
As per sample Subject to quote**
* Request the feasibility for these categories

Model	H (cm)	L (cm)	Interaxis (cm)	Heat output in Watts				Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)	Price Chrome G0 (€)
				COLOURED version		CHROMED version					
				ΔT. 50°C	ΔT. 30°C	ΔT. 50°C	ΔT. 30°C				
RKO15S#100015	37,9	100,0	96,6	502	266	452	239				
RKO15S#100024	60,4	100,0	96,6	754	400	679	360				
RKO15S#120015	37,9	120,0	116,6	603	319	543	288				
RKO15S#120024	60,4	120,0	116,6	904	479	814	432				
RKO15S#140015	37,9	140,0	136,6	703	372	633	335				
RKO15S#140024	60,4	140,0	136,6	1055	560	950	504				
RKO15S#160015	37,9	160,0	156,6	804	426	724	383				
RKO15S#160024	60,4	160,0	156,6	1206	640	1085	575				

Model	H (cm)	L (cm)	Interaxis (cm)	Heat output in Watts				Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)	Price Chrome G0 (€)
				COLOURED version		CHROMED version					
				ΔT. 50°C	ΔT. 30°C	ΔT. 50°C	ΔT. 30°C				
RKO15S#100015B2R	37,9	100,0	96,6	502	266	452	239				
RKO15S#100024B2R	60,4	100,0	96,6	754	400	679	360				
RKO15S#120015B2R	37,9	120,0	116,6	603	319	543	288				
RKO15S#120024B2R	60,4	120,0	116,6	904	479	814	432				
RKO15S#140015B2R	37,9	140,0	136,6	703	372	633	335				
RKO15S#140024B2R	60,4	140,0	136,6	1055	560	950	504				
RKO15S#160015B2R	37,9	160,0	156,6	804	426	724	383				
RKO15S#160024B2R	60,4	160,0	156,6	1206	640	1085	575				

	Code	Description	Finishes	Price (€)
	Z1TLNR#ANR12...	Paired Valve + Lockshield - Copper angle 1/2" and/or Multi-layer 1/2"	Standard White	
	Z1KITRAC#001	6-part connector KIT: - 2x Z1RAC#R12CRO - 2x Z1RAC#R14CRO - 2x Z1AC#M03CRO	Glossy Chrome	
	Z1KITRAC#002	8-part connector KIT: - 2x Z1RAC#R12CRO - 2x Z1RAC#R14CRO - 2x Z1RAC#M03CRO - 2x Z1RAC#M01CRO	Glossy Chrome	

For more information on the choice of valves, see page 324



	Code	Description	Finishes	Price (€)
	GVR#...	RECESSED Valve that can be fitted with a thermostat and Lockshield assembly for REMOTE connection	Chromed Plated	
	GVRTG#...	RECESSED thermostatic valve and Lockshield assembly for REMOTE connection*		
	GVRCH#...	RECESSED Valve that can be fitted with a thermostat and Lockshield assembly for REMOTE connection	Coloured Coloured	
	GVRTC#...	RECESSED thermostatic valve and Lockshield assembly for REMOTE connection*		
Plated finishes: See table of Tubes special finishes Colored Finishes: see categories C0, C1, C2 and C3 of the Tubes color chart * The price does not include the cost of the thermostatic head (see page 324)				

RITMATO CUSTOM MADE RO14 - RO14D

Hydraulic radiator made of carbon steel



CUSTOM-MADE Ritmato - RO14

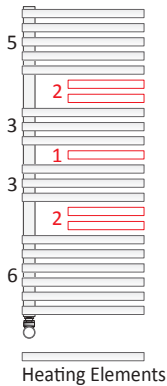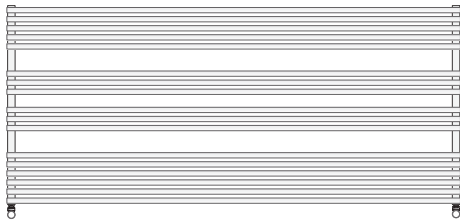

Heating Elements

Empty space
corresponding to a
missing element

The CUSTOM-MADE RITMATO model has the distinguishing feature of having empty spaces as per the customer's requirements, so it is tailor-made; in order to understand how to place the correct order, please refer to detail "A" opposite.

RITMATO	RO14	Width 180 cm
Spacing	5-2-3-1-3-2-6	
In other words, from the top down:		
- First group of 5 heating elements		
- Empty space 2 i.e. two fewer elements		
- First group of 3 heating elements		
- Empty space 1 i.e. one fewer element		
- First group of 3 heating elements		
- Empty space 2 i.e. two fewer elements		

Based on the chosen spacing, the technical characteristics and the price are provided in the price table of the single CO14 model for the RO14 whereas for the double RO14D version, consult the data sheet for the CO14D. By checking the corresponding table, the result is:


Height	$5+2+3+1+3+2+5=22 = 53,8 \text{ cm}$
Heat output	1350 Wa DT50°C

RITMATO CUSTOM MADE RO25 - RO25D

Hydraulic radiator made of carbon steel



CUSTOM-MADE Ritmato - RO25

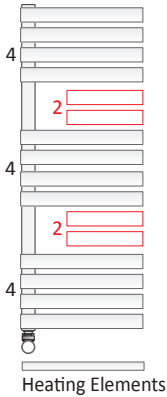

Heating Elements

Empty space
corresponding to a
missing element


The CUSTOM-MADE RITMATO model has the distinguishing feature of having empty spaces as per the customer's requirements, so it is tailor-made; in order to understand how to place the correct order, please refer to detail "A" opposite. The spacing CANNOT be irregular but only constant.

RITMATO	RO25	Width 150 cm
Spacing	4-2-4-2-4 (constant spacing)	
In other words, from the top down:		
- First group of 4 heating elements		
- Empty space 2 i.e. two fewer elements		
- First group of 4 heating elements		
- Empty space 2 i.e. two fewer elements		
- First group of 4 heating elements		


Based on the chosen spacing, the technical characteristics and the price are provided in the price table of the single CO25 model for the RO25 whereas for the double RO25D version, consult the data sheet for the CO25D. By checking the corresponding table, the result is:

Height	$4+2+4+2+4=16$
Heat output	1281 Wa DT50°C

CUSTOM-MADE Ritmato - RO14

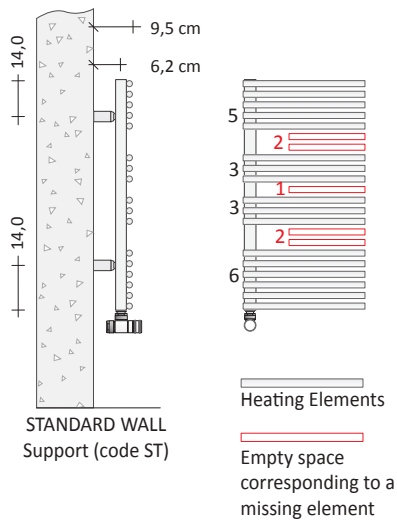

CUSTOM-MADE Ritmato - RO25

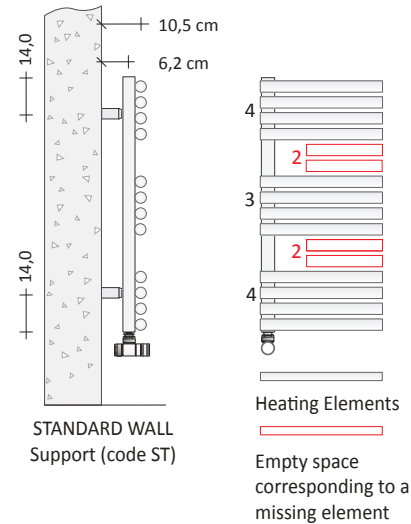

CONNECTORS The Horizontal Radiators are supplied as standard with connectors “OB1”



If different connectors are required, strictly indicate this in the order. **IMPORTANT:** the connectors for radiators connected to the same system must all have the same configuration, otherwise operating problems may occur.

Standard connectors

Supplied unless otherwise specified in the order.




Special connectors

Provided upon request **WITH** an additional charge of



Connectors on request

Connector available upon request **AT NO** additional charge.

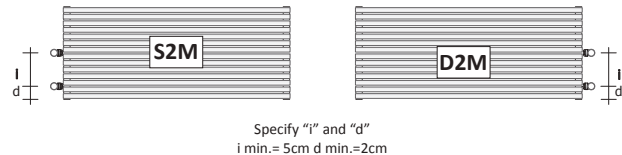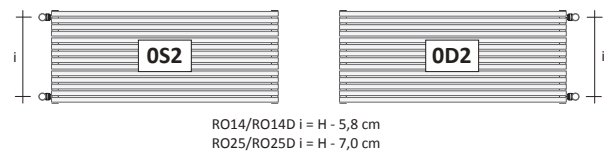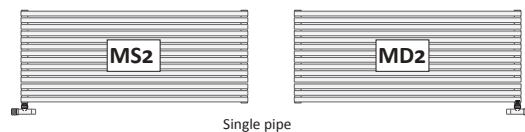

Standard convertible valves – Z1TLNR

For more information on the choice of valves, see p. 314



	Code	Description	Finishes	*Price (€)
	Z1TLNR#ANR12...	Paired Valve + Lockshield - Copper angle 1/2" and/or Multi-layer 1/2"	Standard White	
	Z1KITRAC#001	6-part connector KIT: - 2x Z1RAC#R12CRO - 2x Z1RAC#R14CRO - 2x Z1AC#M03CRO	Glossy Chrome	
	Z1KITRAC#002	8-part connector KIT: - 2x Z1RAC#R12CRO - 2x Z1RAC#R14CRO - 2x Z1RAC#M03CRO - 2x Z1RAC#M01CRO	Glossy Chrome	

For versions with a Coloured finish other than white, see pages 318, 319, 320, 321, 322.




Ritmato KUBIK electric - RKO15SE..

All the thermostats referred to in the following articles comply with the ECDesign standard.

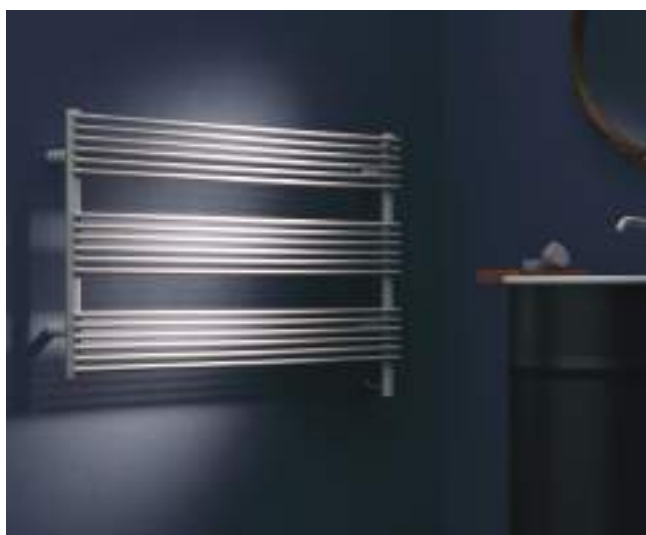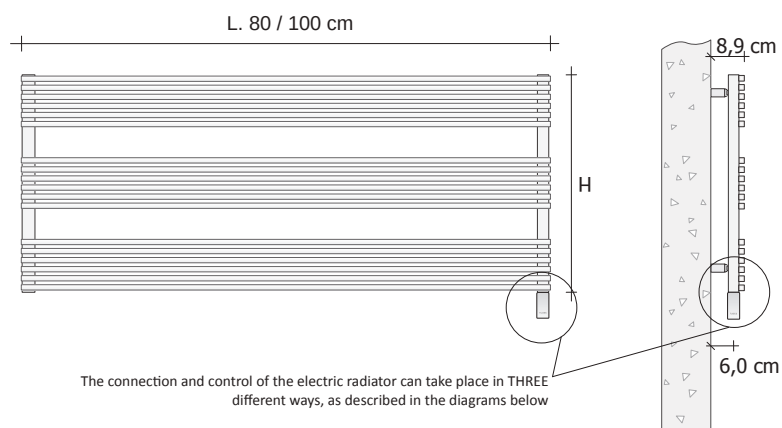


Ritmato 14 electric - RKO15SE..

All the thermostats referred to in the following articles comply with the ECDesign standard.

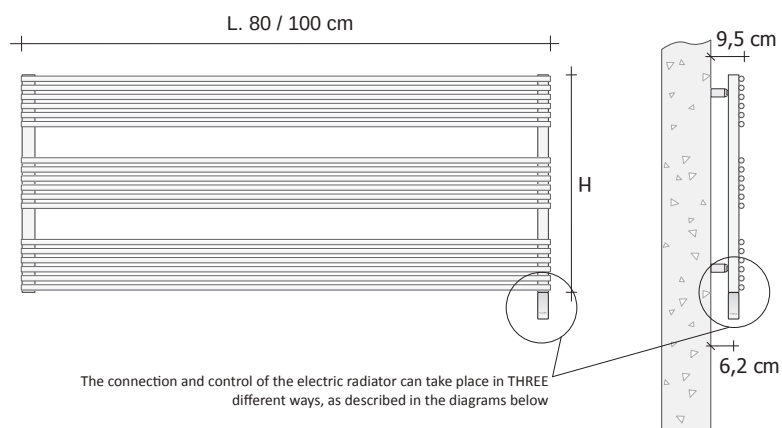


Ritmato 25 electric - RKO15SE..

All the thermostats referred to in the following articles comply with the ECDesign standard.

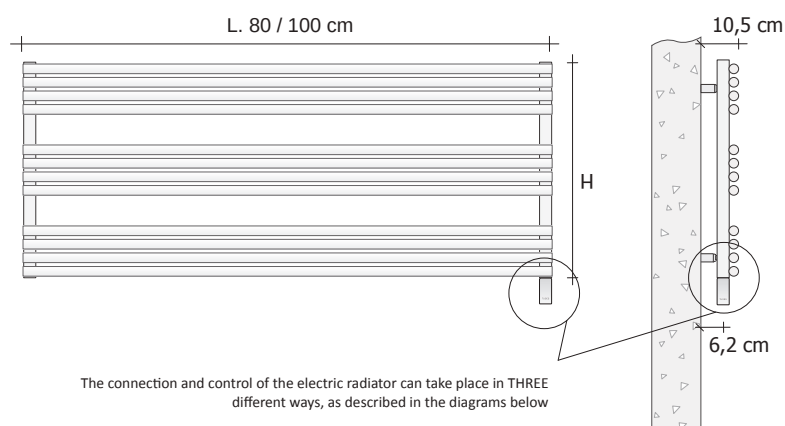


Method of connection and control of the electric radiator


Connection to the electricity
mains with Standard Edge
Cap



Connection to the electricity
mains with ECDesign
Thermostat



Connection to the electricity
mains with ECDesign
Wireless Thermostat



All the thermostats referred to in the following articles comply with the ECDesign standard.

RITMATO KUBIK electric - RKO15SE.. -

The electric version with WIRELESS control includes the digital Chronothermostat Kit

Electric version with edge cap	Colour code of the edge cap			Code DESIGN* Edge Cap*	L (cm)	H (cm)	Electrical Resistance (Watts)	Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
	White	Anthracite Grey	Chrome*							
RKO15SEL#080024	U6	V6	Z6	T7	80,0	60,4	400 W			
RKO15SEL#100024	U2	V2	Z2	T8	100,0	60,4	600 W			
Electric version with ECDesign thermostat	Thermostat code ROOM*				L (cm)	H (cm)	Electrical Resistance (Watts)	Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
	White	Chrome	Matt Black							
RKO15SET#080024	J6	J8	JP		80,0	60,4	400 W			
RKO15SET#100024	G5	G7	JQ		100,0	60,4	600 W			
Electric version with wireless ECDesign controls	Colour code of the edge cap			Code DESIGN* Edge Cap*	L (cm)	H (cm)	Electrical Resistance (Watts)	Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
	White	Anthracite Grey	Chrome							
RKO15SEW#080024	U6	V6	Z6	T7	80,0	60,4	400 W			
RKO15SEW#100024	U2	V2	Z2	T8	100,0	60,4	600 W			

RITMATO 14 electric - RO14SE.. -

The electric version with WIRELESS control includes the digital Chronothermostat Kit

Electric version with edge cap	Colour code of the edge cap			Code DESIGN* Edge Cap*	L (cm)	H (cm)	Electrical Resistance (Watts)	Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
	White	Anthracite Grey	Chrome*							
RO14SEL#080024	U6	V6	Z6	T7	80,0	58,6	400 W			
RO14SEL#100024	U2	V2	Z2	T8	100,0	58,6	600 W			
Electric version with ECDesign thermostat	Thermostat code ROOM*				L (cm)	H (cm)	Electrical Resistance (Watts)	Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
	White	Chrome	Matt Black							
RO14SET#080024	J6	J8	JP		80,0	58,6	400 W			
RO14SET#100024	G5	G7	JQ		100,0	58,6	600 W			
Electric version with wireless ECDesign controls	Colour code of the edge cap			Code DESIGN* Edge Cap*	L (cm)	H (cm)	Electrical Resistance (Watts)	Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
	White	Anthracite Grey	Chrome							
RO14SEW#080024	U6	V6	Z6	T7	80,0	58,6	400 W			
RO14SEW#100024	U2	V2	Z2	T8	100,0	58,6	600 W			

RITMATO 25 electric - RO25SE.. -

The electric version with WIRELESS control includes the digital Chronothermostat Kit

Electric version with edge cap	Colour code of the edge cap			Code DESIGN* Edge Cap*	L (cm)	H (cm)	Electrical Resistance (Watts)	Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
	White	Anthracite Grey	Chrome*							
RO25SEL#080016	U6	V6	Z6	T7	80,0	56,5	400 W			
RO25SEL#100016	U2	V2	Z2	T8	100,0	56,5	600 W			
Electric version with ECDesign thermostat	Thermostat code ROOM*				L (cm)	H (cm)	Electrical Resistance (Watts)	Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
	White	Chrome	Matt Black							
RO25SET#080016	J6	J8	JP		80,0	56,5	400 W			
RO25SET#100016	G5	G7	JQ		100,0	56,5	600 W			
Electric version with wireless ECDesign controls	Colour code of the edge cap			Code DESIGN* Edge Cap*	L (cm)	H (cm)	Electrical Resistance (Watts)	Price Standard White Cat. C0 (€)	Price Category C1/C2 (€)	Price Category Cat. C3 (€)
	White	Anthracite Grey	Chrome							
RO25SEW#080016	U6	V6	Z6	T7	80,0	56,5	400 W			
RO25SEW#100016	U2	V2	Z2	T8	100,0	56,5	600 W			

* Provided with an additional charge of

** The DESIGN edge cap, painted in the same color as the towel warmer ordered, is supplied with a price supplement of for both the C1 / C2 and Chrome version.